


**DP-8.5-11 Static Dissipative Sheet Protector**  
**Sheet Protector, 2 mil, 8.625" x 11.25", 100/pack**

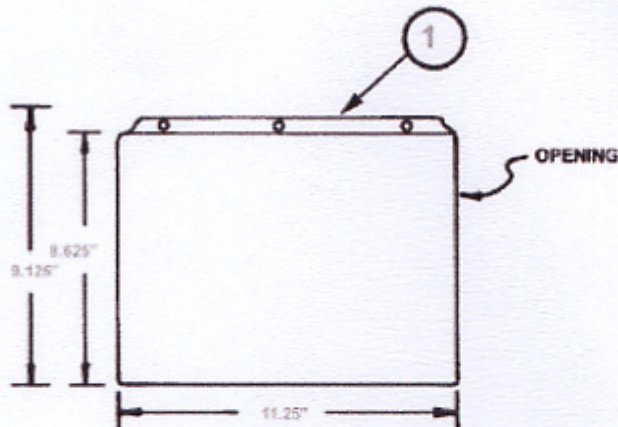

This product is designed for use in ESD controlled areas where there are ESD sensitive devices. All sheet protectors are made from 2 mil, stable, amine-free, polypropylene clear film. Dissipative agent is coated with an effective shelf life exceeding two years. This product is designed to hold 8.5" x 11" sheets.

- ⚙ Low charging and dissipative
- ⚙ 3-hole punched for ring binders
- ⚙ Edge hot stamped with ESD symbol, yellow stripe
- ⚙ Humidity Independent
- ⚙ N-Octononic Acid Free
- ⚙ Does not cause corrosion
- ⚙ No measurable outgassing

**Electrical Properties**

Static Decay:	<.05 sec.	NFPA-56A
Static Decay:	<.013 sec.	MIL B 81705B
Surface Resistivity:	10e9 - 10e11	ASTM D-257 at 15% RH

**Specifications:**

Polycarbonate Compatibility:	Yes	
Corrosivity:	Negligible	FTMS 101C method 3005
Ion Content	Below Detection limits	Sodium, Fluoride, Phosphate, Sulfide
Tensile Strength	2400 psi	ASTM D-882
Elongation at Break	600%	ASTM D-882
Drawing Note 1:	Sheet protector comes with holes for US standard three ring binder. Yellow stripe, ESD symbol and wording: "Static Dissipative"	