

**GROUND CORDS**



**Common Point Cord**

**FEATURES:**

- Designed for use at workstations
- Provides a common grounding point for one or two wrist straps, as well as table mats and runners.
- Meets the requirements of EIA 625 and EOS/ESD S6
- Available with or without one meg ohm resistor
- 15 ft. cord terminated with a #10 ring terminal
- 10mm stud securely snaps to the mat

ITEM	DESCRIPTION
CPGE-1-15-M or F	Common point ground cord (1 meg ohm resistor)
CPGE-15-M or F	Common point ground cord (no resistor)

\*Available in Female or Male Straps




**Multi Point Ground Block**

**FEATURES:**

- Designed for use at workstations
- Provides a common grounding point for one to four wrist straps, as well as table mats and runners
- Mounts two #10 screws allowing unit to be securely installed to workbench
- Four banana jacks provide four grounding points
- Available without one meg ohm resistor
- 15 ft. cord terminated with a #10 ring terminal

ITEM	DESCRIPTION
CPG-1046	15 ft. Cord (1 meg ohm resistor)





## Bench Mount Dual Common Point Ground System

**FEATURES:**

- Designed for use at workstations.
- Provides a common grounding point for one or two wrist straps, as well as table mats and runners.
- 10 mm or 4 mm stud securely snaps to the mat or pair of mounting holes with two #10 screws allowing unit to be securely installed to workbench .
- Two banana jacks provide two grounding points .
- One meg ohm resistor not included.
- 10 ft. cord terminated with a #10 ring terminal
- Also available in 15' cord.

ITEM	DESCRIPTION
CPGE-1045 - 4mm	10 ft. Cord (4 mm snap)*
CPGE-1045 - 10mm	10 ft. Cord (10 mm snap)




## Floor Mat Ground Cord

**FEATURES:**

- Designed for grounding floor mats, runners, and shelf liners
- Low profile, beveled cap prevents the snap from being accidentally removed from mat by rolling chairs or carts
- 15 ft. cord terminated with a #10 ring terminal
- Available with or without one meg ohm resistor
- 10mm stud securely snaps to the mat

ITEM	DESCRIPTION
FMGE-1-15-M	Floor mat ground cord (1meg ohm resistor)

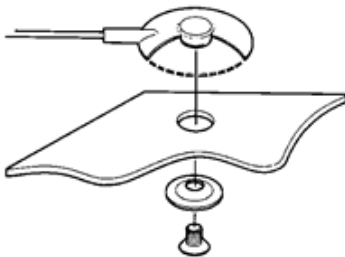

## Standard Bench/Floor Mat Ground Cord



**FEATURES:**

- Durable polyurethane coated cord with 5, 10 or 15 feet of wire terminated with #10 ring terminal
- Meets the requirements of EOS/ESD S1
- High quality strain relief will withstand in excess of 20,000 bending cycles
- Available with or without one meg ohm resistor
- 10mm female snap socket

ITEM	DESCRIPTION
GCE-1-5-F	5 ft. Mat Cord (with resistor)
GCE-1-10-F	10 ft. Mat Cord (with resistor)
GCE-1-15-F	15 ft. Mat Cord (with resistor)
GCE-1-5-F	5 ft. Mat Cord (without resistor)
GCE-1-10-F	10 ft. Mat Cord (without resistor)
GCE-1-15-F	15 ft. Mat Cord (without resistor)

## Standard Coil Cord



**FEATURES:**

- Durable polyurethane coated coil cord which ends in a banana jack
- Meets the requirements of EOS/ESD S1
- High quality strain relief will withstand in excess of 20,000 bending cycles
- Comes with one megohm resistor and alligator clip adapter as standard equipment
- Available in 6 ft., 8.5 ft., 10 ft. or 12 ft. lengths
- Date coded for QC Traceability
- UL listed
- Available with 4 mm snaps or 10 mm snaps.

ITEM	DESCRIPTION
CGC-1-6	6 ft. Coil Cord
CGC-1-8.5	8.5 ft. Coil Cord
CGC-1-10	10 ft. Coil Cord
CGC-1-12	12 ft. Coil Cord




### Reversible/Stacking Ground Cord

**FEATURES:**

- Stacking snap allows it to be used as a common point ground
- Available in 10 ft. or 15 ft. lengths
- Built-in one megohm resistor
- Fits 10mm stud or socket

ITEM	DESCRIPTION
GCRSE-1-10	10 ft. Cord
GCRSE-1-15	15 ft. Cord

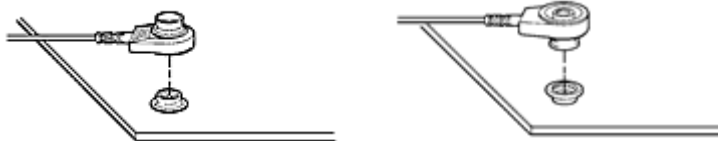

### PGC-015G Green 15 Foot Ground Cord

15 foot straight common point ground cord with two banana receptacles, in low profile housing for connecting two wrist straps. The PGC-015G includes one  $1.0 \times 10^6$  ( $\pm 20\%$ ) current limiting resistor molded in the snap housing, a low profile housing with a 10 mm male snap for easy connection to mat, a male banana plug for cord connection to ground.

The PGC-015G is made in accordance with EN 100015/1, ESD S1.1-1998, ESD S 6.1-1999.



### PGC-016B Black 15 Foot Ground Cord

15 foot straight common point ground cord with two banana receptacles, in low profile housing for connecting two wrist straps. The PGC-016B includes one  $1.0 \times 10^6$  ( $\pm 20\%$ ) current limiting resistor molded in the snap housing, a low profile housing with a 10 mm male snap for easy connection to mat, a male banana plug for cord connection to ground.

The PGC-016B is made in accordance with EN 100015/1, ESD S1.1-1998, ESD S 6.1-1999.