




Ground Zero Electrostatics FLOOR GROUNDING PLATE - SP-GNDPLT-ASM

FLOOR GROUNDING PLATE - SP-GNDPLT-ASM

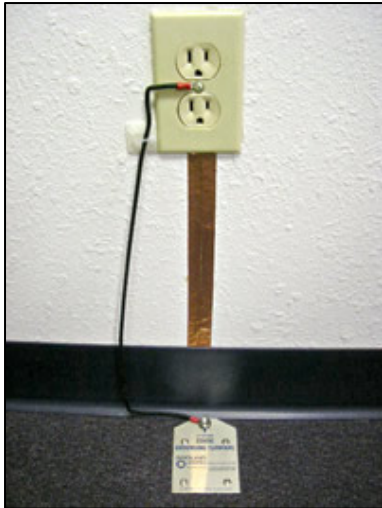

Heavy gage stainless steel construction provides secure anchoring with ESD Conductive or Dissipative materials including vinyl, carpet, anti-fatigue matting and runners. Excellent for grounding flooring to AC electrical conduit and building ground system.

- Heavy gage stainless steel construction.
- Provides secure anchoring to ESD conductive or dissipative flooring materials including vinyl, carpet, rubber, epoxy, floor matting and runners
- Excellent in providing secondary floor grounding and PTP (Point to Point) stability to AC electrical conduit and/or building ground system.
- The grounding plate provides access to a less than 0.1 Ω groundable point via a 10mm snap and provides an additional grounding path of less than 1E04 Ω from the ESD flooring system to earth.
- Dimensions: 2 3/4" by 3 3/4"
- Standard 20" 18 gauge lead wire terminated in a # 10 eyelet for connection to an AC receptacle plate
- Material is free from Mercury contamination, is RoHS compliant, and was "Melted and Manufactured in the USA".



4916 26th Street West, Suite 100, Bradenton, Florida 34207

Toll Free 877-GND-ZERO (463-1376), **Direct Phone** 941-751-7581 **Fax** 1-941-751-7586

Email sales@gndzero.com

http://www.gndzero.com